

ROTARY SCREW COMPRESSOR
CSM MINI 3 - 4 - 5,5 - 7,5 - 10^{NEW} HP

TECHNOLOGY YOU CAN TRUST

The CSM MINI Range

MINI 3 - 4 - 5,5 - 7,5 - 10 HP

A solution to satisfy all needs



Base Mounted Version

Especially recommended for installations near the place of use or the expansion of existing systems.

The electrocompressor's main components are: air suction filter, compressor, electric motor, oil filter and cooler, air cooling system, electrical panel for power-on and adjustment, support base and elegant sound-proof casing.

Tank Mounted Version

Particularly recommended for new or stand-alone installations where there is a need for compressed air with a low noise level.

The unit consists of an electrocompressor on a fixed, 200 and 270-litre tank.



Dry Version

Especially recommended for installations with compressed air demands with a low dew point.

The compression unit is made up of electrocompressor, tank and refrigerating dryer with gas R134a with indicator of the dew point and timed condensate drain.

Reliability

Ceccato has been producing compressed air since 1938

It is a compressor constructed with components that have been tested for years in many industrial plants.


- **A high-efficiency screw assembly.**
- **top brand-name components.**
- **high-tech assembling.**
- **Industrial compressor know-how.**
- **the CSM MINI compressor's reliability is the result of decades of experience in the production and treatment of compressed air.**



CSM MINI comes standard with a magneto-thermal circuit-breaker main switch that protects both the machine and the power line.



All machine parts are protected against any anomaly and nothing is allowed to irreparably damage any component or the machine.

The strict observance of safety and environmental hygiene regulations during the design phase and the high degree of efficiency of our assembly lines are our guarantee.

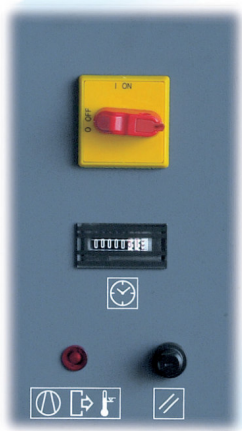

Maxi low noise level

Given the type of user, the noise pollution produced by small-power compressors was never given the proper attention until now but with CSM MINI, the problem has been eliminated.

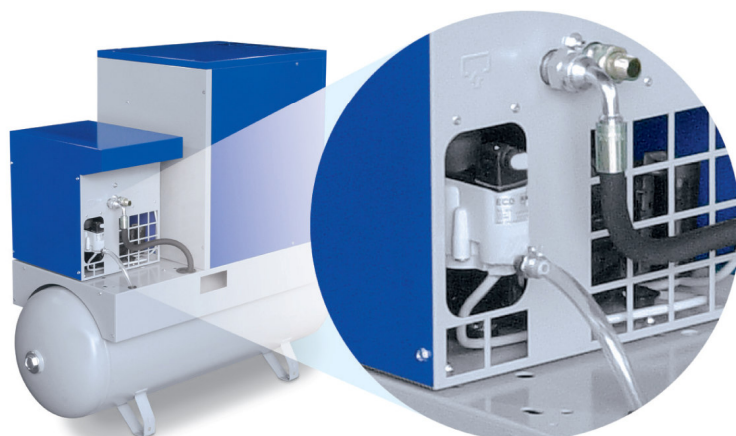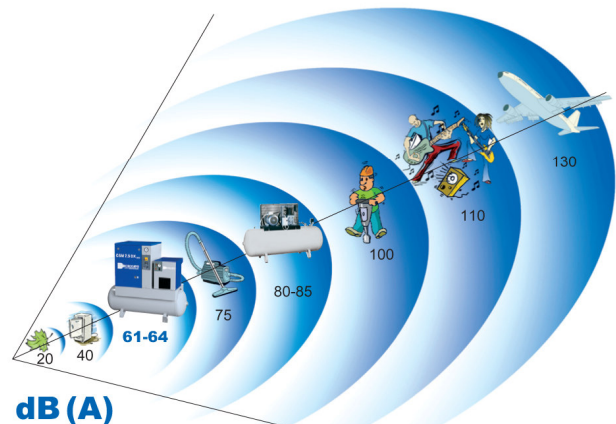

Smart condensate drain


Advantages

- **Draining only water and NOT compressed air = Energy savings**
- **Quiet, no acoustic impact = Respect for the environment**

Screw Compressor

A small-power machine with big-compressor components:

- a high-efficiency screw unit for compressing air without metal parts touching;
- an efficient cooling system;
- dry air in the DRY version with dryer;
- completely automatic operation for an industrial service;
- a complete compression unit ready to use.

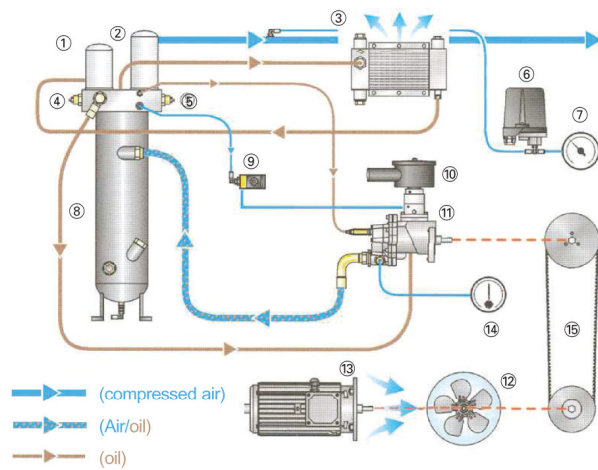

Adjustment

A new adjustment concept, created by combining the advantages of a piston compressor with those of a screw compressor.

Simple and complete instrumentation for correctly using and operating the compressor.

- | | |
|------------------------------|--------------------------------|
| 1 - Oil filter | 9 - Air suction solenoid valve |
| 2 - Air-oil separator filter | 10 - Air suction air filter |
| 3 - Oil cooler | 11 - Screw compressor |
| 4 - Thermostatic valve | 12 - Fan |
| 5 - Safety valve | 13 - Electric motor |
| 6 - Pressure switch | 14 - Thermometer/Thermostat |
| 7 - Pressure gauge | 15 - Transmission unit |
| 8 - Oil reservoir | |

Dry air

The CSM MINI with CDX dryer is the winning solution for specific uses that require condensate-free air:

- supplies condensed air without condensate;
- safeguards the operation of the equipment;
- improves the quality of the final product;
- requires less space for installation;
- cancels the cost of installing the dryer;
- respects the environment with the use of ecological gas.




Why choose CSM MINI

TWO TECHNOLOGIES COMPARED



yesterday's



PISTON COMPRESSORS



today's



SCREW COMPRESSORS

70 - 75% of the intake air

Air yield

95% of the intake air
More air with lower energy costs

Greater than 80 dB(A)

Sound level

MINI from 61 to 66 dB(A)
Almost as low as a household appliance

For intermittent use

Operation

Also for continuous use
An industrial technology

High content of residual
oil and humidity

Air quality

Low oil content and dry air in the
version with dryer
Cleaner air for better production

Alternating and pulsing

Compression

Continuous and constant
Uniform pressure in line for better
functioning utilities

High

Vibrations

Absent
More reliable components

From 7 to 10 times nominal value

Starting current










From 3 to 5 times nominal
value in the star/delta version
Lower energy consumption at start-up

Thermal circuit breaker

Standard protections

Magneto-thermal circuit breaker
Greater operator safety

Technological evolution, the ever greater needs of increasingly sophisticated users and respect for the environment are just three of the many reasons behind the CSM MINI's design
the small screw compressor with big compressor performance

| TYPE |  | |  | |  | | |  |  |  | | |  |  |  |
|--|--|-----|--|-----|--|-------------------|------|--|---|--|-----|------|--|--|--|
| | bar | psi | hp | kW | l/min | m ³ /h | cfm | dB(A) | V/Hz/Ph | L | W | H | litres | gas | kg |
| BASE MOUNTED COMPRESSOR | | | | | | | | | | | | | | | |
| CSM 3/8 B* MINI | 8 | 118 | 3 | 2,2 | 300 | 18,0 | 10,6 | 61 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 99 |
| CSM 3/10 B* MINI | 10 | 145 | 3 | 2,2 | 240 | 14,4 | 8,5 | 61 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 99 |
| CSM 4/8 B MINI | 8 | 118 | 4 | 3 | 445 | 26,7 | 15,8 | 61 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 103 |
| CSM 4/10 B MINI | 10 | 145 | 4 | 3 | 320 | 19,2 | 11,3 | 61 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 103 |
| CSM 5,5/8 B MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 105 |
| CSM 5,5/10 B MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 105 |
| CSM 5,5/8 BX MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 105 |
| CSM 5,5/10 BX MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 105 |
| CSM 7,5/8 BX MINI | 8 | 118 | 7,5 | 5,5 | 700 | 42,0 | 24,8 | 64 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 110 |
| CSM 7,5/10 BX MINI | 10 | 145 | 7,5 | 5,5 | 600 | 36,0 | 21,2 | 64 | 400/50/3 | 620 | 605 | 950 | - | 3/4 | 110 |
| CSM 10/8 BX MINI | 8 | 118 | 10 | 7,5 | 1008 | 60,5 | 35,7 | 66 | 400/50/3 | 620 | 635 | 975 | - | 3/4 | 160 |
| CSM 10/10 BX MINI | 10 | 145 | 10 | 7,5 | 920 | 55,2 | 32,6 | 66 | 400/50/3 | 620 | 635 | 975 | - | 3/4 | 160 |
| TANK MOUNTED COMPRESSOR | | | | | | | | | | | | | | | |
| CSM 3*8 MINI | 8 | 118 | 3 | 2,2 | 300 | 18,0 | 10,6 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 155 |
| CSM 3*10 MINI | 10 | 145 | 3 | 2,2 | 240 | 14,4 | 8,5 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 155 |
| CSM 4/8 MINI | 8 | 118 | 4 | 3 | 445 | 26,7 | 15,8 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 157 |
| CSM 4/10 MINI | 10 | 145 | 4 | 3 | 320 | 19,2 | 11,3 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 157 |
| CSM 5,5/8 MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 159 |
| CSM 5,5/10 MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 159 |
| CSM 5,5/8 X MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 159 |
| CSM 5,5/10 X MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 159 |
| CSM 7,5/8 X MINI | 8 | 118 | 7,5 | 5,5 | 700 | 42,0 | 24,8 | 64 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 164 |
| CSM 7,5/10 X MINI | 10 | 145 | 7,5 | 5,5 | 600 | 36,0 | 21,2 | 64 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 164 |
| CSM 10/8 X MINI | 8 | 118 | 10 | 7,5 | 1008 | 60,5 | 35,7 | 66 | 400/50/3 | 1420 | 648 | 1280 | 200 | 1/2 | 214 |
| CSM 10/10 X MINI | 10 | 145 | 10 | 7,5 | 920 | 55,2 | 32,6 | 66 | 400/50/3 | 1420 | 648 | 1280 | 200 | 1/2 | 214 |
| DRY VERSION COMPRESSOR - TANK - DRYER | | | | | | | | | | | | | | | |
| CSM 3/8 D* MINI | 8 | 118 | 3 | 2,2 | 300 | 18,0 | 10,6 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 187 |
| CSM 3/10 D* MINI | 10 | 145 | 3 | 2,2 | 240 | 14,4 | 8,5 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 187 |
| CSM 4/8 D MINI | 8 | 118 | 4 | 3 | 445 | 26,7 | 15,8 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 191 |
| CSM 4/10 D MINI | 10 | 145 | 4 | 3 | 320 | 19,2 | 11,3 | 61 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 191 |
| CSM 5,5/8 D MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 193 |
| CSM 5,5/10 D MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 193 |
| CSM 5,5/8 DX MINI | 8 | 118 | 5,5 | 4 | 560 | 33,6 | 19,8 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 193 |
| CSM 5,5/10 DX MINI | 10 | 145 | 5,5 | 4 | 470 | 28,2 | 16,6 | 62 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 193 |
| CSM 7,5/8 DX MINI | 8 | 118 | 7,5 | 5,5 | 700 | 42,0 | 24,8 | 64 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 198 |
| CSM 7,5/10 DX MINI | 10 | 145 | 7,5 | 5,5 | 600 | 36,0 | 21,2 | 64 | 400/50/3 | 1420 | 575 | 1255 | 200 | 1/2 | 198 |
| CSM 10/8 DX MINI | 8 | 118 | 10 | 7,5 | 1008 | 60,5 | 35,7 | 66 | 400/50/3 | 1420 | 648 | 1280 | 200 | 1/2 | 254 |
| CSM 10/10 DX MINI | 10 | 145 | 10 | 7,5 | 920 | 55,2 | 32,6 | 66 | 400/50/3 | 1420 | 648 | 1280 | 200 | 1/2 | 249 |

B = Base mounted X = Star delta D = Dry with dryer

new version

Standard Version:

- Direct start-up for 3 and 4 HP - direct or star/delta for 5,5 HP - star/delta for 7,5 and 10 HP.
- Electric motor with IP 55.
- Magneto-thermal mains circuit breaker.
- First oil charge
- * Also available in 230 Volt/50 Hz, single-phase
- Also available with different voltages
- All versions also available on the 270 liter tank. [Dimensions (1498x582x1340) (1498x648x1365 only for 10 HP) (Weight: +11 Kg)]



The company reserves the right to make any changes from the point of view of continuous product improvement.



Design, Construction,
Sales and Service
for compressors, dryers
and filters for compressed air

